


## PDU-B Safety Label - 3" x 1.5" Black on White

SKU: TB-RCT-30X15-BW-A-79E9B0
Category: Rectangle Labels
Color: Black On White

### ENGRAVED TEXT

Line 1: "PDU-B"

### SPECIFICATIONS

| | |
|---|---|
| Width | 76.2mm (3.00") |
| Height | 38.1mm (1.50") |
| Material | 2-Ply Engraved Modified Acrylic |
| Engraving Depth | 0.003" (0.076mm) - Depth may vary |
| Surface Finish | Matte |
| Thickness | 0.0625" (1.6mm) |
| Cutting Method | Precision Cut |

### TOLERANCES

Length: +/-0.12" | Width: +/-0.12" | Thickness: +/-5%

### DURABILITY & ENVIRONMENT

- UV Tested: 3+ years without significant color change (ISO 4892-3)
- Suitable for outdoor use
- Temperature Range: -40F to 200F


### SAFETY RATINGS

| NFPA 704 | HMIS |
|---|---|
| Health: 0 (Minimal) | Health: 0 (Minimal) |
| Flammability: 1 (Slight) | Flammability: 1 (Slight) |
| Reactivity: 0 (Minimal) | Physical Hazard: 0 (Minimal) |

*Transport: Not classified as dangerous goods*

**Product: PDU-B Safety Label - 3" x 1.5" Black on White**

SKU: TB-RC

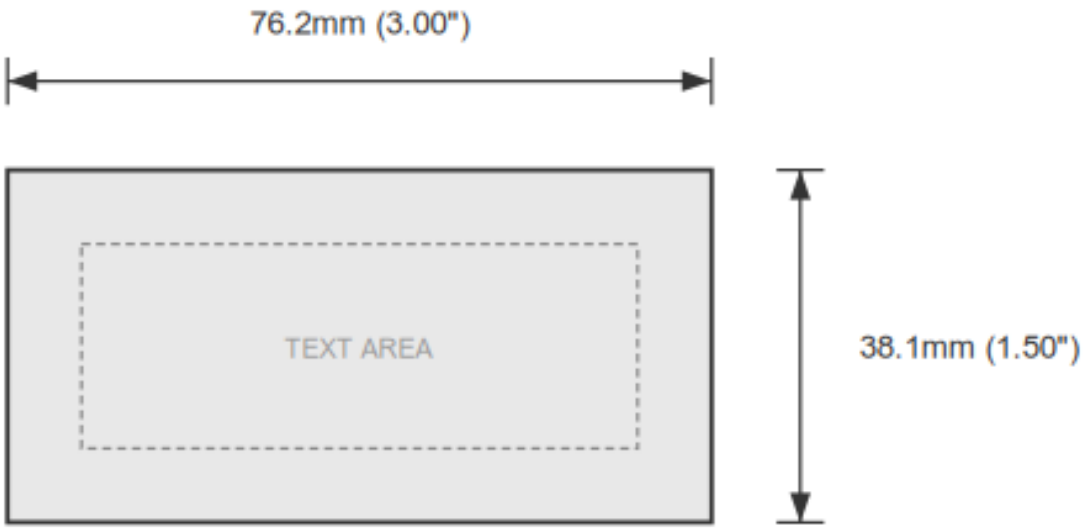


## DIMENSIONS

| | |
|---|---|
| Width | 76.2mm (3.00") |
| Height | 38.1mm (1.50") |
| Text Size | 5.0mm (0.20") |
| Color | Black On White |
| Corner Style | Square |
| Holes | No |
| Mounting | Adhesive backing |

## NOTES

1. All dimensions in millimeters unless otherwise noted
2. Drawing not to scale
3. See page 1 for manufacturing tolerances
4. Custom sizes available upon request

## CARE, CLEANING & SHELF LIFE

- Cleaning: any household detergent with a soft cloth. Use ammonia- or alcohol-based cleaners sparingly with light pressure to avoid micro-scratches. No abrasives, rubbing compounds or scouring pads.
- Storage: flat, in a dry indoor area at steady room temperature, out of direct sunlight.
- Shelf life: the engraved plastic does not expire in storage. UV and outdoor ratings assume the top layer is not scratched through.
- Adhesive backing: apply within 24 months of manufacture for full bond strength. Apply to a clean, dry, oil-free surface, ideally at 70F or warmer (not below 50F), and press firmly. Bond reaches full strength in about 72 hours.